


NOTES:

- MATERIALS**
 - HOUSING: ENGINEERING THERMOPLASTIC. COLOUR: BLACK. FLAMMABILITY RATING UL 94V-0
 - CONTACTS: PHOSPHOR BRONZE
 - PLATING: GOLD PLATING ON MATING AREA REFER TO THE AMPHENOL PART NO.
 - 50 μ" [1.27 MICRONS] MIN. NICKEL UNDERPLATE
 - 100 μ" [2.54 MICRONS] MIN. MATTE-TIN OR GOLD FLASH ON CONTACT TAILS.
 - SHIELD: COPPER ALLOY PLATING: NICKEL
- RECOMMENDED SOLDERING TEMPERATURE**
WAVE SOLDERING PEAKED AT 265°C MAX FOR 10 SECOND MAX.

AMPHENOL PART NUMBER

RJSNE-XF80-08
GOLD PLATING
D = 6u"
G = 15u"
J = 30u"
5 = 50u"

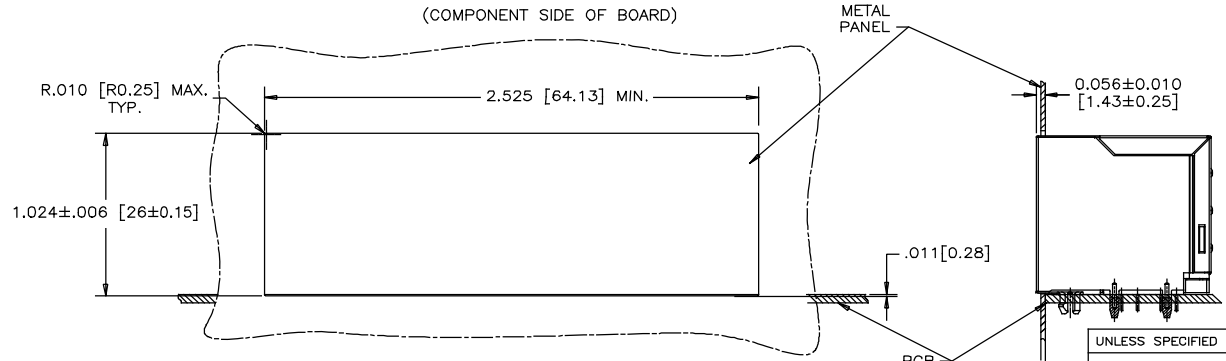

UNLESS SPECIFIED OTHERWISE		DRAWN	RONNIE.C	MAY09/18	Amphenol Canada Corp. www.amphenolcanada.com	
PRIMARY UNITS: INCHES		CHECKED	AMY.Z	MAY09/18	TITLE	
SECONDARY: MILLIMETERS		M.E. APP'D			STACKABLE MODULAR JACK, 2X4 PORTS, 8 POSITIONS, 8 CONTACTS, WITHOUT LEDS, SHIELDED WITHOUT TABS, .100INCH CONTACT TAILS, TRAY PACKAGING -RoHS COMPLIANT	
		Q.A. APP'D			DWG NO.	
		DWG APP'D			P-RJSNE-XF80-08	
		ENG. REL. NO.			REF. EAR# RJ18096	
1 DECIMAL PLACE		THIRD ANGLE PROJECTION			DWG NO.	
2 DECIMAL PLACES ±.015					P-RJSNE-XF80-08	
3 DECIMAL PLACES					REV A	
ANGULAR DEGREES					CODE ID NO. 03554 DWG SIZE SCALE SHEET 1 OF 1	