




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JUN30/15	L.CHAN
B	FIX ERROR	APR27/17	L.CHAN

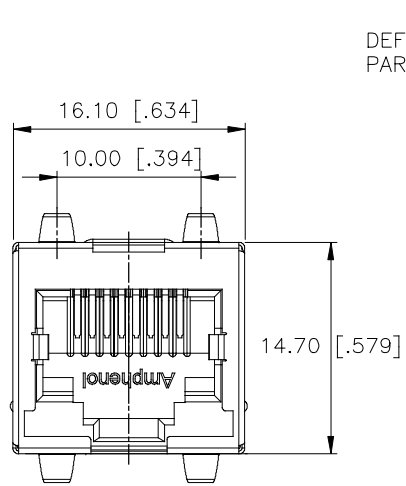


FRONT VIEW

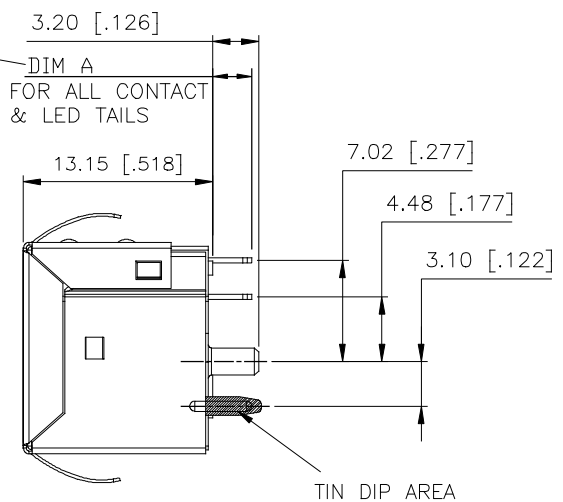

SIDE VIEW



BOTTOM VIEW

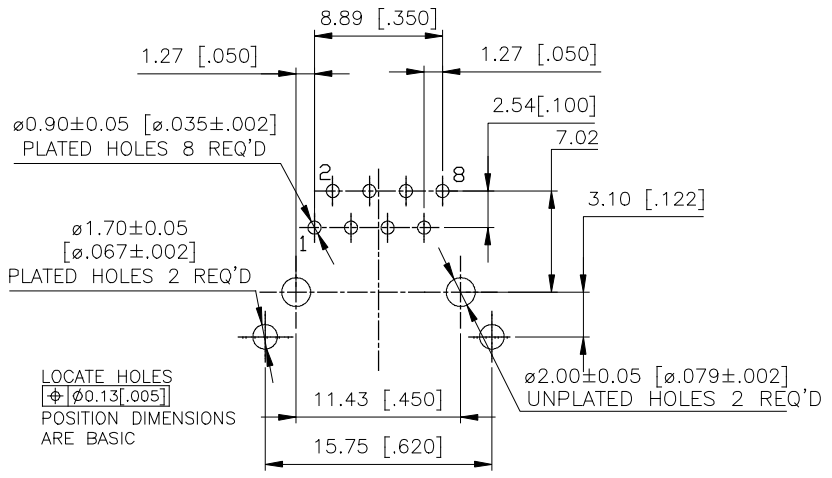

RECOMMENDED P.C.B LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCES: +/- 0.05[.002]

1. MATERIALS:
PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE
PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES SEE AMPHENOL PART NUMBER FOR DETAIL.
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH TIN DIPPED SOLDER TAIL.
2. RECOMENDED SOLDER PROCESS: WAVE SOLDERING PEAKED AT 260°C FOR 5 SECONDS MAXIMUM.

AMPHENOL PART NUMBER: RJE88-188-2X0X
GOLD PLATING OPTION
1=6u" GOLD PLATING
2=15u" GOLD PLATING
3=30u" GOLD PLATING
4=50u" GOLD PLATING
DIM A (TAIL LENGTH)
0=2.70 MM
A=3.50 MM



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN <i>AMY Z</i>	DATE <i>JUN30/15</i>	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS MILLIMETER	CHECKED <i>Lawrence C</i>	DATE <i>JUN30/15</i>	
SECONDARY INCH	M.E. APP'D		TITLE
REFERENCE IN PARENTHESES	Q.A. APP'D		MODULAR JACK, 8 POSITIONS, 8 CONTACTS, SHIELDED, WITHOUT LED TRAY PACKAGING—RoHS COMPLIANT
GENERAL TOLERANCES	DWG APPR.		DWG. NO.
1 DECIMAL PLACE ±0.45	ENG. REL. NO.		P-RJE88-188-2X0X
2 DECIMAL PLACES ±0.30	REF.		REV <i>B</i>
3 DECIMAL DEGREES ±0.15	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE: c SCALE: N/A SHEET 1 OF 1
ANGULAR DEGREES ±1.0°			